



ANDREA
COMMUNICATIONS



SG-110M

DIRECTIONAL SHOTGUN MICROPHONE

- Directional Shotgun Microphone with enhanced sensitivity for fa-field sound reception
- Highly directional polar response
- Adjustable microphone tilt with rubber-padded base
- Compact and lightweight for easy portability
- 30-inch shielded cable with 3.5 mm TRRS plug
- Compatible with smartphones, tablets, laptops, and PCs with a shared audio port
- Includes C-300 Mobile Microphone Adapter for use with a PC, digital recorder, or a USB adapter
- Includes USB-C to TRRS adapter for use with any phone, tablet or computer with a USB-C port

PARAMETER	VALUE
Directional Microphone	
Frequency Range	100 Hz-10 KHz
Distortion	< 1%
Signal-to-Noise Ratio	60 dB
Sensitivity	-36.5 dB +/- 3 dB (0 dB=1V/pa@1KHz)
Supply Bias Resistor	2.2 K Ω +/- 0.5 K Ω
Operating Voltage	1 Vdc to 1 Vdc
Supply Current	500 mA
Operating Temperature	-20°C to +60°C
Microphone Interface	
Microphone Plug	3.5 mm
Tip - Not Used	
Ring - Not Used	
Ring - Ground	
Sleeve - Mic +	



WITH 3.5 MM TRRS PLUG



ADJUSTABLE BASE



INCLUDES TRAVEL BAG




INCLUDES C-300
MOBILE ADAPTER



INCLUDES USB-C TO
TRRS ADAPTER

HIGHLY DIRECTIONAL POLAR RESPONSE

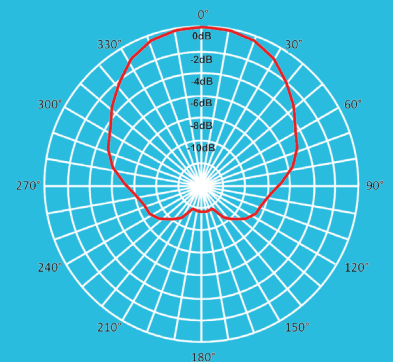

Education



Speech
Recognition



Note
Taking

Andrea Communications LLC
140 Finn Court • Farmingdale, New York 11735
800.442.7787 • sales@andreacomunications.com
www.andreacomunications.com

